


Main Features

- Compact, low weight
- High reliability
- Low PIM
- Simple installation
- AISG/DC bypass

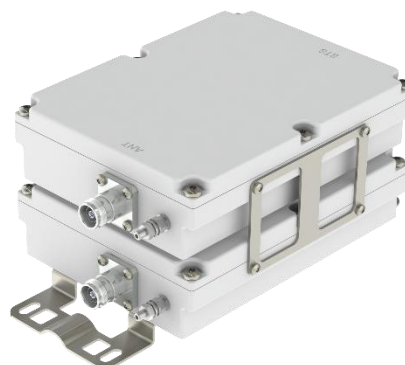

Electrical Specifications

Items	Value
Frequency	703-803 & 898-960MHz
Return loss	≤-18dB
Insertion loss	≤0.5dB@703-803MHz
	≤0.7@898-960MHz
Rejection	≥50@825-870MHz
	≥60@870-890MHz
Power handling	100W(average)
Intermodulation (3rd order)	≤-155dBc @ 2 x 43dBm
DC PASS	DC Bypass
Impedance	50Ω


Environmental Specifications

Items	Value
Operating temperature range	-30°C to +70°C
Storage temperature range	-40°C to +85°C
Relative humidity	5%- 95%
Applications	IP67
Lightning protection	10kA 8/20 us

Mechanical Specifications

Items	Value
Dimension	227 x 171 x 113 (mm, excluding brackets and connectors)
Weight	≤5.3kg
Connectors type	4.3-10 female
Mounting	Wall or pole
Packing	1Pcs in box

Outline Drawing

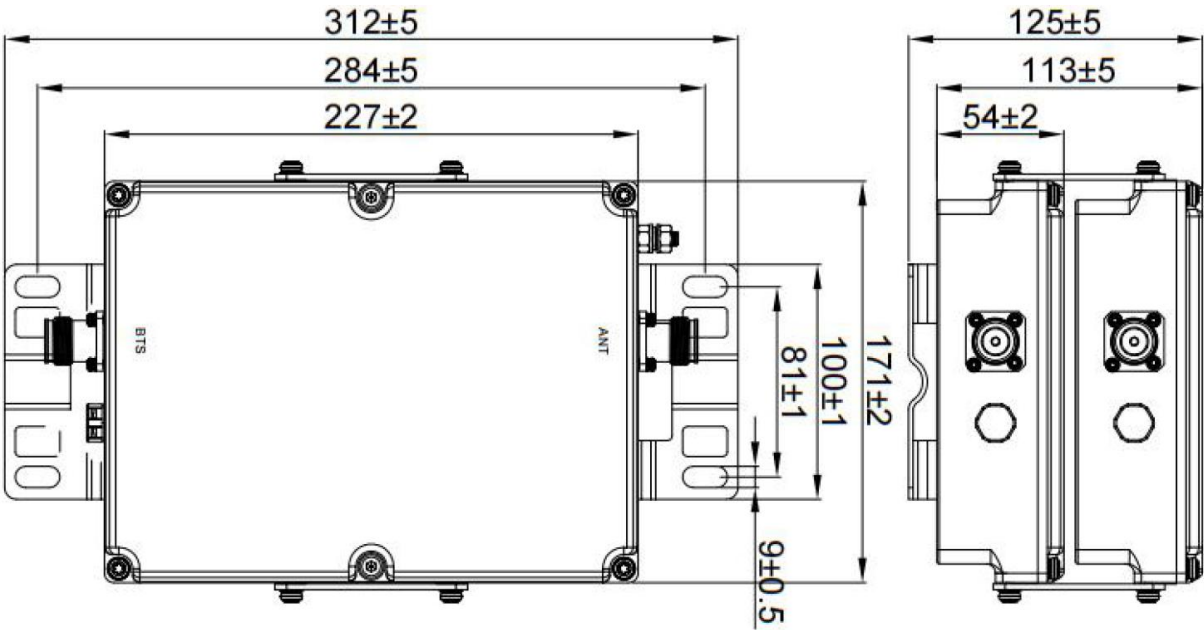

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.