

PR-RCP1-NF-C06L

N female connector for 1 1/4" low loss coaxial cable

PROSE

- 50 Ω impedance
- N female interface
- Frequency 12 GHz
- Field installation
- High performance at RF return-loss and PIM
- Heavy duty, sturdy and durable

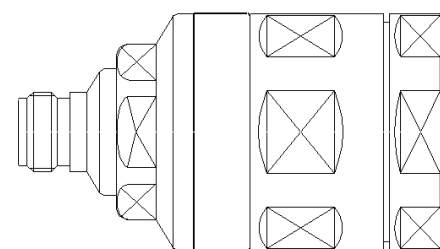


Photo for reference

Part number

PR-RCP1-NF-C06L	N female connector for 1 1/4" low loss coaxial cable
	According to IEC61169-16

Part list

NO.	Description	Material	Plating
1	Inner conductor	Bronze	Ag
2	Outer conductor	Brass	Tri-alloy
3	Body	Brass	Tri-alloy
4	Insulator	TPX	
5	O-ring	Silicone rubber	

Document

Document	MA_RCP1-1 1/4 installation instruction
----------	--

Electrical data

Characteristics impedance	50 Ω
Insulation resistance	$\geq 5G\Omega$
Center contact resistance	1m Ω
Outer contact resistance	0.25m Ω
Dielectric withstanding voltage	2500V rms
Operating voltage	1400V rms
Insertion loss	0.05* $\sqrt{F}$ GHz dB
Return loss	≤ -30 dB @ DC-1.0GHz
	≤ -28 dB @ 1.0-2.2GHz
	≤ -26 dB @ 2.2-2.7GHz
	≤ -24 dB @ 2.7-3.8GHz

DTF	$\leq -35\text{dB @DC-1.0GHz}$
	$\leq -30\text{dB @1.0-2.7GHz}$
	$\leq -28\text{dB @2.7-3.8GHz}$
Intermodulation (3 rd Order), 2x43dBm	$\leq -160\text{dBc}$

Mechanical data

Interface	N female
Suitable cable	1 1/4" series, PLC50E-114/ SL 114R L PE/ AVA6-50/ LCF114 and similar
Mating cycles	≥ 500 times
Coupling nut retention	$\geq 450\text{N}$
Connector torque proof recommend	0.7 to 1.3N.m

Environment

Working temperature	-45°C to +85°C
IP protection	IP68, mated pair
RoHS	Compliant

Notice

- 1, The connection should be covered with addition weatherproof kits for long time duration.
- 2, Connection molding shape may be changed during the product life-time due to the manufacture skill upgrade.

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.