

PR-CST2-40A-XXX-XX

Cold shrink tube ϕ 40mm, mastic inside

PROSE

- Reliable seal against water
- Tough, resilient rubber holds press seal even after exposure
- Eliminates need for heat source or special tools
- Easy installation and save times
- Resistant to fungus, ozone, alkalis and acids



Photo for reference

Part number

PR-CST2-40A-XXX-XX	Cold shrink tube ϕ 40mm, mastic inside
1 2 3 4	
*1, CST indicates the cold shrink tube type	
*2, 40A indicates the diameter	
*3 XXX indicates the rubber length after extracting	
*4 XX indicates the rubber color, BK-Black, GY-Gray, others as request	

Material

Rubber	Silicone rubber
Plastic core	PE/PC

Dimensions

Inner diameter (plastic core)	40mm
Inner diameter after extracting (rubber tube)	≤ 12 mm
Thickness after extracting (rubber tube)	3mm
Length after extracting (rubber tube)	As request

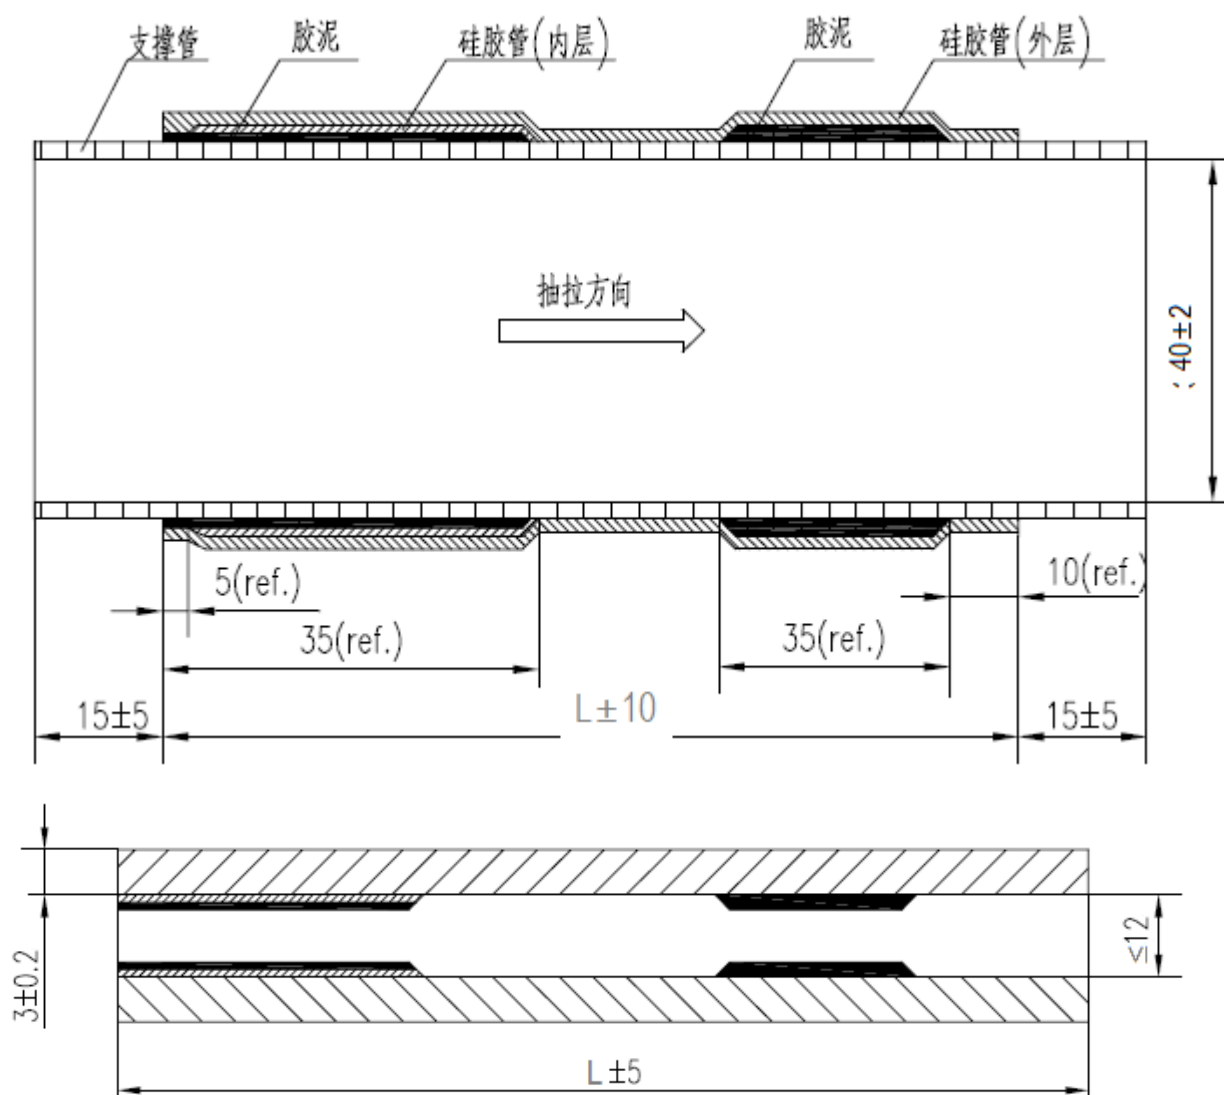
Technical data

Hardness, Shore A	40
Tensile strength	9.0MPa
Elongation at break	820%
Tear strength	32kN/m

Environment

Operating temperature	-40°C to +90°C
Flammability	UL94-V1
UV resistance 1000h,	Pass, black and gray color
IP protection	IP68, IEC 60529
RoHS	Compliant

参考图纸

应确保冷缩管保存一年后，抽出橡胶管内径 $\leq 12\text{mm}$

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.