


Main Features

- Low VSWR, high isolation
- Low PIM, low insertion loss
- Compact design for easy installation
- Customized band is available

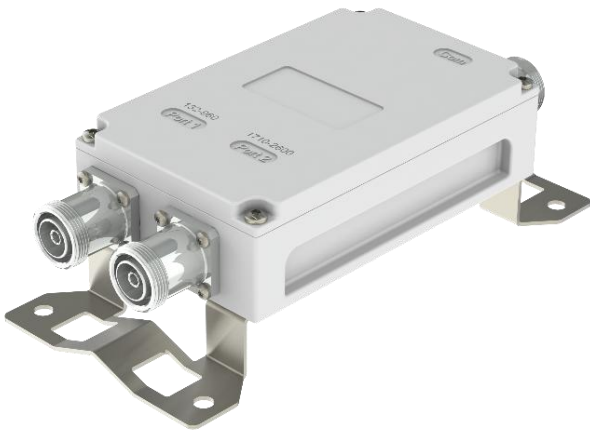

Electrical Specifications

Items	Value
Frequency	CH1:132-960 MHz
	CH2:1710-2600 MHz
Return loss / VSWR	≤-18dB / 1.3
Insertion loss	≤0.5dB@132-960 MHz
	≤0.5dB@1710-2600 MHz
Isolation	≥50dB
Power handling	50W (average)
Impedance	50Ω


Environmental Specifications

Items	Value
Operating temperature range	-25°C to +65°C
Storage temperature range	-40°C to +85°C
Relative humidity	5%- 95%
Applications	IP65

Mechanical Specifications

Items	Value
Dimension	181x110x52 (mm, excluding brackets and connectors)
Weight	≤1.8 kg
Connectors type	7/16 female
Number of input ports	2
Number of output ports	1
Mounting type	Wall or Pole
Mounting Pipe Hardware	Band clamps
Packing	1Pcs in box

Outline Drawing

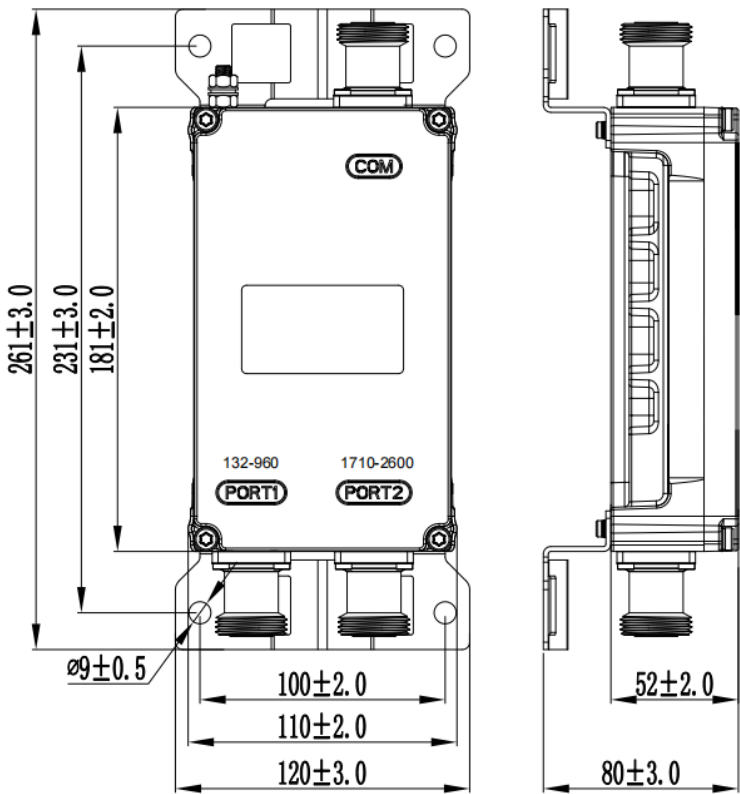

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.