

Main Features

- Low VSWR, high isolation
- Low PIM, low insertion loss
- Compact design for easy installation



Electrical Specifications

Items	Value
Frequency	888.4-952.4MHz
Return loss/VSWR	≤-19dB/1.25
Insertion loss	≤0.5 dB @888.4-893 MHz
	≤0.35 dB @893-952.4 MHz
Rejection	≥50 dB@824-880 MHz
Intermodulation	≤-155dBc@2x43dBm
Power handling	200W (TX band)
Impedance	50Ω


Environmental Specifications

Items	Value
Operating temperature range	-25°C to +65°C
Storage temperature range	-40°C to +85°C
Relative humidity	5%- 95%
Applications	IP67

Mechanical Specifications

Items	Value
Dimension	240x198x49 (mm, excluding brackets and connectors)
Weight	≤3.3 kg
Connectors type	4.3-10 female
Packing	1Pcs in box

Outline Drawing

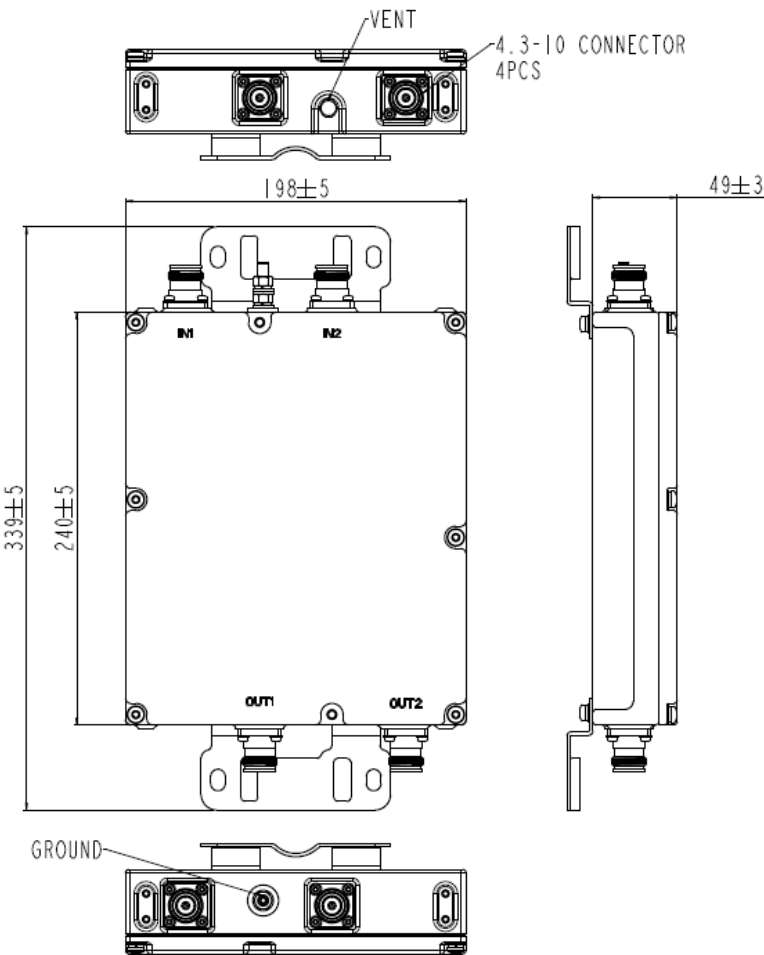

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.