

Main Features

- Compact, Low weight
- Combiner
- Contain DCS, WCDMA/LTE2600 band
- Low PIM
- Simple installation



Electrical Specifications

Items	Value
Frequency	CH1: 1710-1880MHz
	CH2: 1920-2690MHz
VSWR	≤1.3:1
Insertion loss	0.2dB Typical/≤0.4dB Maximum @1710-1880 MHz
	0.2dB Typical/≤0.4dB Maximum @1920-2690 MHz
Pass band Ripple	≤0.18dB Typical
Isolation	≥55dB
Power handling	250W
Intermodulation (3rd order)	-160dBc @ 2 x 43dBm Typical; ≤-155dBc @ 2 x 43dBm
DC characteristic	DC bypass all ports
Impedance	50Ω


Environmental Specifications

Items	Value
Operating temperature range	-25°C to +65°C
Storage temperature range	-40°C to +85°C
Relative humidity	5%- 95%
Applications	IP67
Salt Fog Standard	IEC 60068-2-11
Lightning Protection	10KA,8/20us
RoHS	Compliant

Mechanical Specifications

Items	Value
Dimension	241x163x122 mm (including brackets size)
Weight	≤ 3.5kg (including brackets weight)
Structure	Coupled by 2 single unit CB-2-DJ-64F-A03
Connectors type	4.3-10 female(Long neck)
Mounting type	Wall or Pole
Band clamps	40-135mm
Packing	1Pcs in box

Outline Drawing

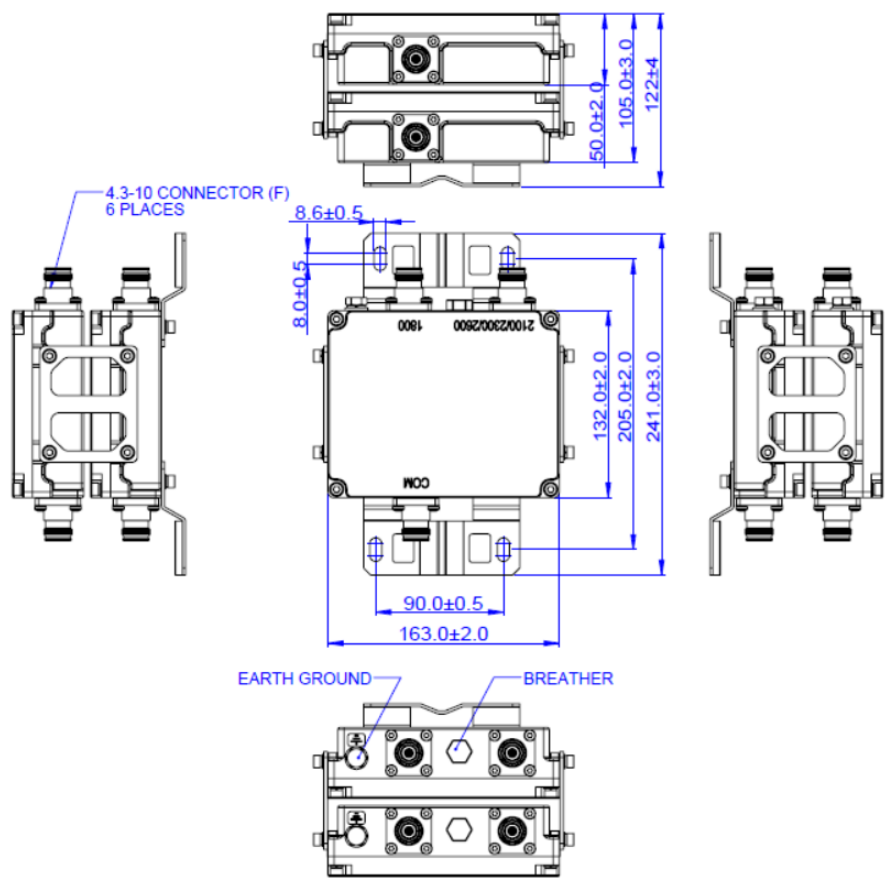

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.