


PRFDP-X-XXXXX-XX-XX-X

Fiber optic distribution panel (OTB: Optical terminal box)

PROSE

- 19" & 21" standard rack mounted panel
- Easy to installation
- Electro-static spraying surface
- Sliding type and fixed type available
- Can include adapters with pigtails

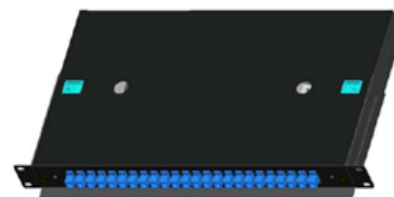

Part number

PRFDP-X-XXXXX-XX-XX-X	19" & 21" Rack mounted fiber optic distribution panel
1 2 3 4 5 6 7	
*1 indicate the panel style: F: fixed type, S: swing type, P: sliding type	
*2 indicate the fiber core: 012=12c, 016=16c, 024=24c, 032=32c, 048=48c, 072=72c, 096=96c, 144=144c, 256=256c...	
*3 indicate the adapter style: SC=SC/UPC, SCA=SC/APC, DSC=DSC/UPC, DSCA=DSC/APC, LC=LC/UPC, LCA=LC/APC, DLC=DLC/UPC, DLCA=DLC/APC, QLC=QLC/UPC, QLCA=QLC/APC...	
*4 indicate the panel height: 1U=1U, 2U=2U, 3U=3U, 4U=4U...	
*5 indicate the adapter/pigtail suitable mode: 0=without adapter, 1=G652D, 2=OM1, 3=OM2, 4=OM3, 5=OM4, 6=G657A1, 7=SM G657A2	
*6 indicate the pigtail: 0=no pigtail, 1=0.9mm pigtail 1m	
*7 indicate the color: 1=Black, 2=Grey, 3=Beige, 4: White	

Dimensions

Width(mm)	482mm(19"), 533mm(21")
Height(mm)	1U, 2U, 3U..., according to the PN
Depth(mm)	160mm~260mm variable for 1U height 260mm for other height

Material

Body	Cold rolled steel
Splice Tray	ABS

Environmental data

Operation temperature	-25°C ~ +55°C
Storage temperature	-40°C ~ +70°C
2011/65/EC (RoHS)	Compliant

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.