

- Soft material, good shape
- flame retardant, from the fire extinguish
- UV resistance and good IP protection
- High mechanical strength, strong viscosity
- Excellent service and electrical insulation

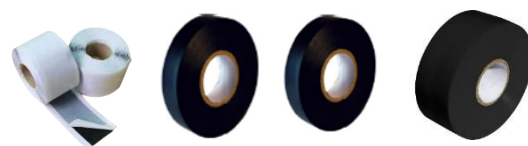


Photo for reference

Part number

PR-WPT08-P65	Weatherproof tapes with 2 rubber tape and 3 PVC tape, RoHS compliant
--------------	--

Part list

Parts	Qty
Butyl Rubber tape 63.5mmx0.6mx3mm	2
PVC tape 19mmx20mx0.18mm	2
PVC tape 50mmx6mx0.18mm	1

Performance

Rubber tape 63.5mmx0.6mx3mm	
Elongation	≥500%
Rating temperature	-40 to +80℃
PVC Tape	
Elongation	≥200%
Adhesion	≥0.196kN/m
Tensile strength	2.12kN/m
Rating temperature	0℃ to +80℃
Flammability	Self-ext UL510

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.