

PWHK-1CXXmm2-XX

Power cable, H07Z1-K

PROSE

- High grade copper wire
- CU/LSZH
- Class 5 flexible conductor
- Rated voltage: 450/750V
- Rated temperature: 70°C
- This product used for power transmission

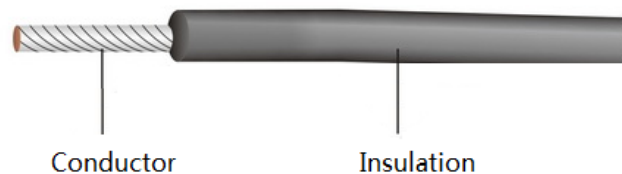


Photo for reference

Part number

PWHK-1C <u>XX</u> mm2- <u>XX</u>	Power cable, 1 core
1 2	
*1 indicate the single core section area	
*2 indicate the insulation colour, the meaning of the numbers is in the "colour code" table.	

For example:	
Part No.	Description
PWHK-1C16mm2-BK	1x16mm ² , Class 5, Black LSZH insulation

Colour code

Insulation color: The meaning of the number is as below.											
C.C.	Blue	Orange	Green	Brown	Grey	White	Red	Black	Yellow	Violet	Yellow/Green*
Abb.(XX)	BL	OR	GN	BN	GY	WH	RD	BK	YW	VT	YG
*(For Yellow/Green) Green is the color stripe.											

Material and dimension

No.	Item		PWHK-1CXXmm2-XX
1	Conductor	Material	Annealed bare copper, IEC 60228 class 5
		Quantity	1 core
2	Tape	Material	Optional (As needed on big section.)
3	Insulation	Material	LSZH

PN	Max. Conductor resistance, 20° C (Ω/km)	Nom. Insulation thickness (mm)	Min. Insulation thickness, (mm)	Approx. Overall Diameter, (mm)
PWHK-1C1.5mm2-XX	13.3	0.7	0.53	3.0
PWHK-1C2.5mm2-XX	7.98	0.8	0.62	3.7

PWHK-1C4mm2-XX	4.95	0.8	0.62	4.2
PWHK-1C6mm2-XX	3.30	0.8	0.62	4.8
PWHK-1C10mm2-XX	1.91	1.0	0.80	6.3
PWHK-1C16mm2-XX	1.21	1.0	0.80	7.3
PWHK-1C25mm2-XX	0.780	1.2	0.98	9.0
PWHK-1C35mm2-XX	0.554	1.2	0.98	10.7
PWHK-1C50mm2-XX	0.386	1.4	1.16	12.7
PWHK-1C70mm2-XX	0.272	1.4	1.16	14.4
PWHK-1C95mm2-XX	0.206	1.6	1.34	16.5
PWHK-1C120mm2-XX	0.161	1.6	1.34	18.2
PWHK-1C150mm2-XX	0.129	1.8	1.52	20.4
PWHK-1C185mm2-XX	0.106	2.0	1.70	22.8
PWHK-1C240mm2-XX	0.0801	2.2	1.88	25.4

Technical data

Rated voltage	450/750 V
Dielectric Strength	AC 2500V, 5min, no breakdown
Rated temperature	-15°C ~ 70°C
RoHS	Compliant
Min. bending radius	8D (D= overall diameter)
Flame retardant	IEC 60332-1-2
Halogen free	IEC 60754-1, IEC 60754-2
Low smoke	IEC 61034-2

Marking on cable

PROSE _ PWHK-1CXXmm2-XX _ _ _ _ (DD+MM+SS+YY+NNNNN) _ _ _ _ XXXXm
Remark1: Printing Interval: 1m, within ±0.5% accuracy.
Remark2: PWHK-1CXXmm2-XX means the product number, and the PN in the actual order shall prevail.
Remark3: (DD+MM+SS+YY+NNNNN) means cable code.
Remark4: XXXXm means cable meter.

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.