


Main Features

- Low PIM with cable termination design
- Wide frequency band DC-4200MHz
- Low VSWR
- Excellent capacity in anti-pulse and burnout
- Easy to be installed
- Customized connector is available

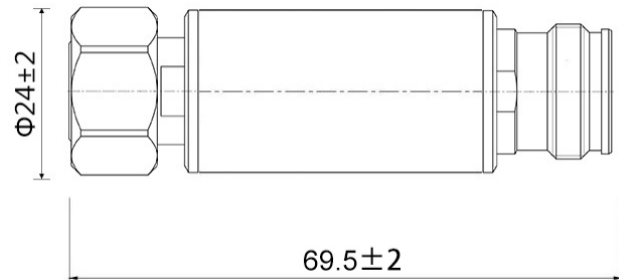

Electrical Specifications

Attenuation value & Accuracy(dB)					VSWR	Power handling
1-9	10	20	30	40		
± 0.7	± 0.7	± 0.8	± 0.8	± 0.8	1.25	2W (20°C)

*XX refer to attenuation in dB

Environmental Specifications

Operating temperature range	-30°C to +70°C
Storage temperature range	-40°C to +85°C
Relative humidity	0%- 95%
Barometric pressure	55KPa -106KPa
Applications	Indoor

Mechanical Specifications

Dimension	$\phi 24 \times 70$ (mm)
Weight	150g
Connectors type	4.3-10 male to 4.3-10 female
Mounting	Plane
Packing	1Pcs in box

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.