

Main Features

- Low VSWR, high isolation
- Low PIM, low insertion loss
- Compact design for easy installation
- Customized band is available

Electrical Specifications

Items	Value
Frequency	2595-2620 MHz
Return loss	≤-18dB
Insertion loss	≤2.7dB at band edge, 1.5dB typical
Rejection	≥60dB@2500-2590&2625-2690MHz
Power handling	100W
Intermodulation	≤-155dBc@2x43dBm
Impedance	50Ω


Environmental Specifications

Items	Value
Operating temperature range	-25°C to +65°C
Storage temperature range	-40°C to +85°C
Relative humidity	0%- 95%
Applications	IP67

Mechanical Specifications

Items	Value
Dimension	162.5x131.7x46 (mm, excluding brackets and connectors)
Weight	≤2.0kg
Connectors type	4.3-10 female
Mounting	Wall and pole
Packing	1Pcs in box

Outline Drawing

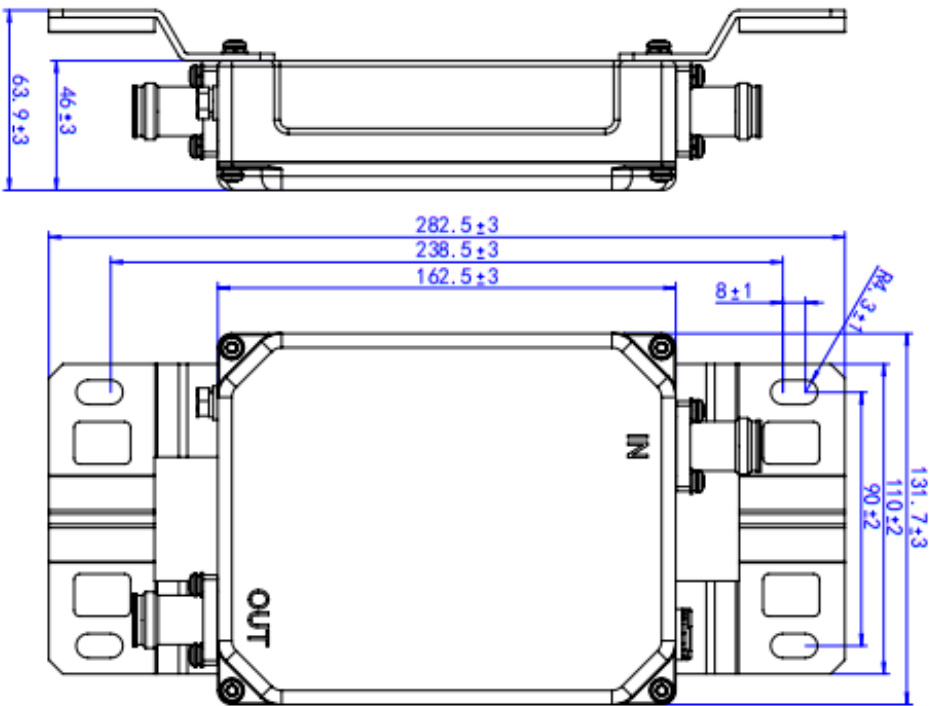

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.