


## Main Features

- Wide frequency band
- Low VSWR
- Excellent capacity in anti-pulse and burnout
- Easy to be installed
- Customized connector is available

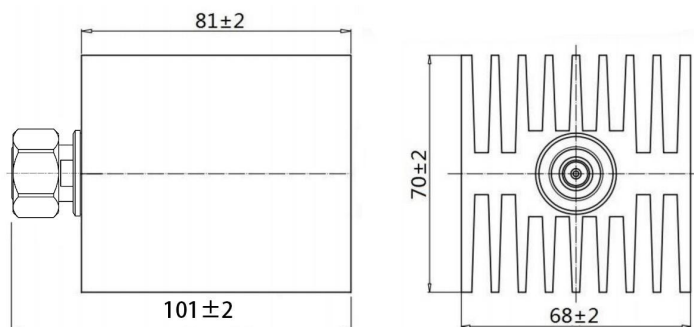

## Electrical Specifications

|                |               |
|----------------|---------------|
| Frequency      | DC to 3800MHz |
| VSWR           | $\leq 1.25$   |
| Power handling | 50W@25°C      |
| Impedance      | 50Ω           |

## Environmental Specifications

|                             |                |
|-----------------------------|----------------|
| Operating temperature range | -30°C to +70°C |
| Storage temperature range   | -40°C to +85°C |
| Relative humidity           | 0%- 95%        |
| Barometric pressure         | 55KPa -106KPa  |
| Applications                | Indoor         |

## Mechanical Specifications

|                 |                    |
|-----------------|--------------------|
| Dimension       | 101 x 68 x 70 (mm) |
| Weight          | 0.65 kg            |
| Connectors type | 4.3-10 male        |
| Mounting        | Plane              |
| Packing         | 1Pcs in box        |

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.