

Main Features

- Low VSWR, low insertion loss
- Low PIM, high reliability
- High power handling
- Compact design for easy installation
- Customized connector is available

Electrical Specifications


Items	Value
Frequency	350 - 2700MHz
VSWR	≤ 1.35
Split loss	3.0dB nominal
Insertion loss	$\pm 0.5\text{dB}$
Power handling	300W
Intermodulation (3rd order)	$\leq -155\text{dBc}@2\text{x}43\text{dBm}$
Impedance	50 Ω

Environmental Specifications

Items	Value
Operating temperature range	-30°C to +70°C
Storage temperature range	-40°C to +85°C
Relative humidity	0%- 95%
Barometric pressure	55KPa -106KPa
Applications	IP65

Outline Drawing

Items	Value
Dimension	332 x 61 x 25 (mm)
Weight	0.5kg
Connectors type	N female
Mounting	Plane
Packing	1Pcs in box

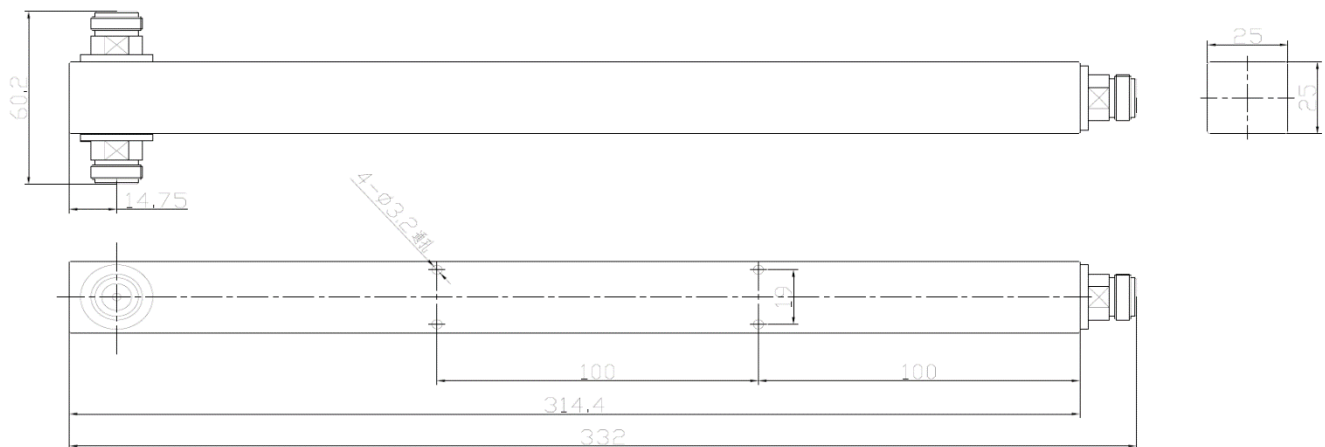

Rev. 1.0 | 2 / 2