

Main Features

- Low VSWR, low insertion loss
- Low PIM, high reliability
- High power handling
- Compact design for easy installation
- Customized connector is available
- Support 5G frequency band

Electrical Specifications


Items	Value
Frequency	698 - 3800MHz
Return loss/VSWR	< -18dB/1.3
Split loss	4.8dB nominal
Insertion loss	±0.4dB nominal
Power handling	300W
Intermodulation (3rd order)	≤-155dBc@2x43dBm
Impedance	50Ω

Environmental Specifications

Items	Value
Operating temperature range	-30°C to +70°C
Storage temperature range	-40°C to +85°C
Relative humidity	0%- 95%
Barometric pressure	55KPa -106KPa
Applications	Indoor

Outline Drawing

Items	Value
Dimension	265.2 x 60.6 x 25 (mm)
Weight	410g
Connectors type	N female
Mounting	Rack
Packing	1Pcs in box

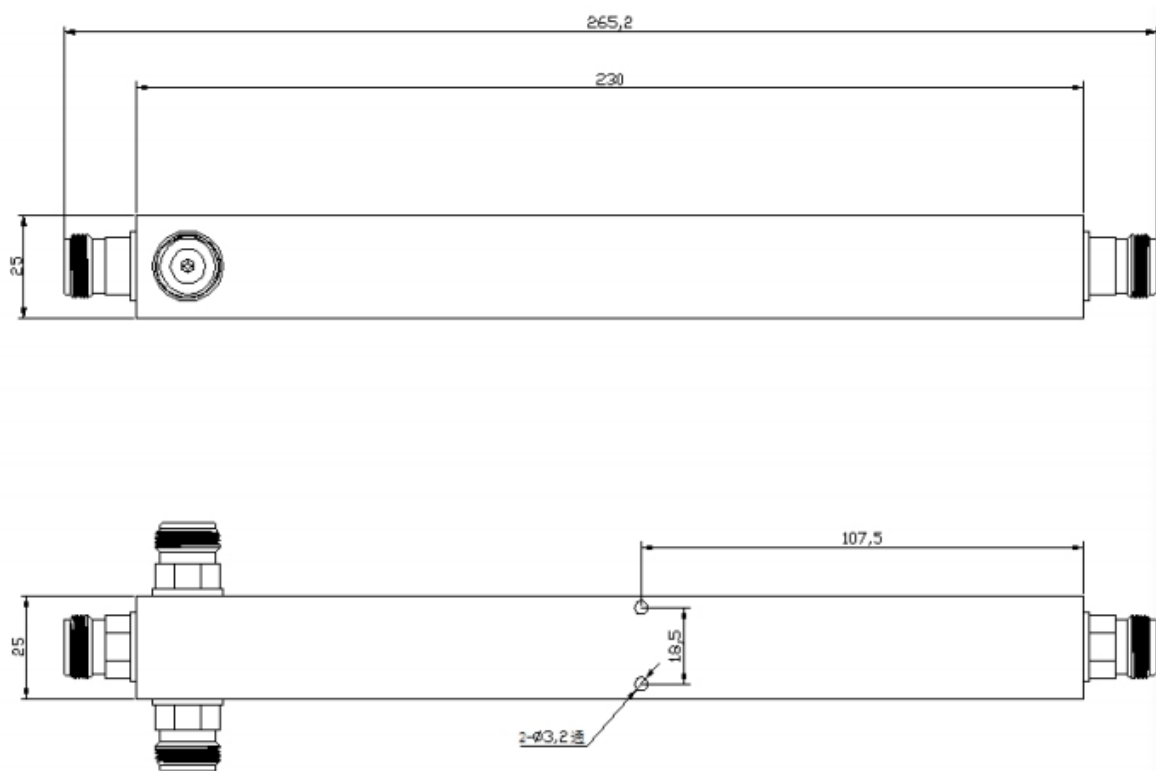

PROSE Technologies | www.prosetechnologies.com

Rev. 1.0 | 2 / 2