

380-2700MHz Indoor Panel Antenna

S-Wave 0327-90-7-64K-O5

PROSE

Main Features

- Ultra-wideband Indoor Panel SISO Antenna
- Vertical Polarization
- Cover 2G/3G/LTE
- High power handling
- Compact, light-weight and easy to install



Electrical Specifications

Items	Value		
Frequency (MHz)	380-470	698-960	1710-2700
Gain (dBi)	3.0±1.5	4 ± 1.5	7 ± 1.5
Vertical 3dB Beam width (°)	50	65	60
Horizontal 3dB Beam width (°)	150	110	75
Polarization	Vertical		
VSWR	≤2.5	≤2.5	
Power handling	50W		
Intermodulation (3rd order)	≤ -153dBc@2x43dBm		
Impedance	50Ω		



Environmental Specifications

Items	Value
Operating temperature range	-30°C to +45°C
Storage temperature range	-40°C to +55°C
Relative humidity	5%- 95%
Barometric pressure	55KPa -106KPa
Applications	Indoor

Mechanical Specifications

Items	Value
Dimension	308x190x65 mm
Weight	0.6kg
Pigtail length	300mm
Connectors type	4.3-10 female
Radome Material	ABS
Mounting	Wall or pole
Packing	1Pcs in box

Patterns

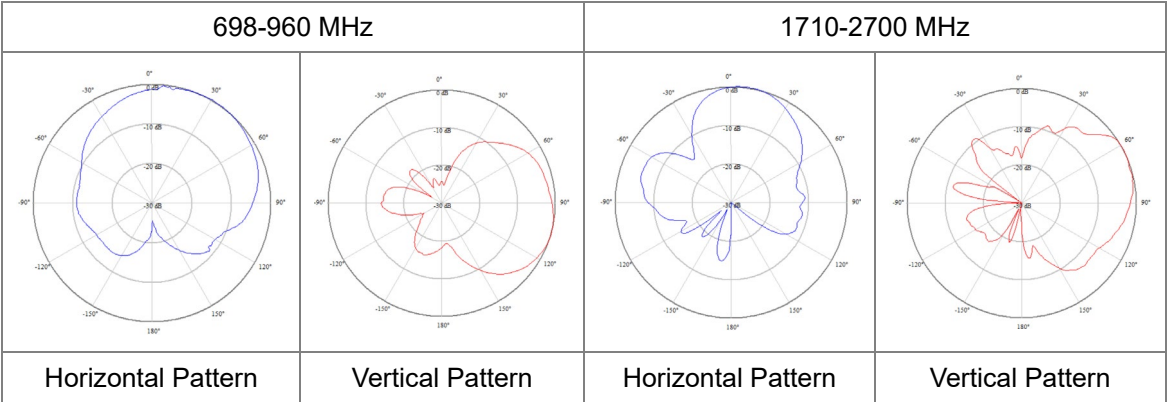

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.