


- Standard loose tube containing fibers and filled with fiber jelly
- Gel-filing loose tube, dry core
- FRP for central strength element with no bonding
- Corrugated steel tape armored
- UV resistance LSZH outer sheath

Part number

PROC-H03L-XXXXXX-XX	Standard loose tube outdoor cable, dry core, armored, LSZH jacket
1 2 3	
*1 indicate the fiber count: 012=12 cores, 024=24 cores, 048=48 cores, 072=72 cores, 096=96 cores, 144=144 cores, 288=288 cores...	
*2 indicate the fiber type: SM1=G652D,SM2=G657A1,SM3=G657A2,OM1=OM1,OM2=OM2,OM3=OM3...	
*3 indicate the fiber quantity per tube: 06=6c/tube for fiber≤36c, 12=12c/tube for fiber > 36c, Special request is available	

Cable construction

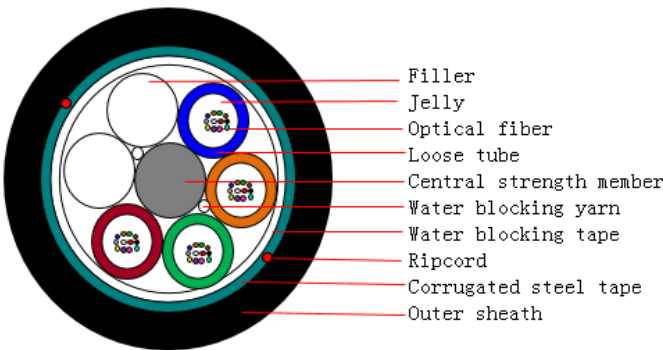

Specification

Parameter		Specification
Loose tube	Material	PBT
	Water-blocking Material	Fiber jelly
Cable core water-blocking material		Water blocking yarn+ water blocking tape
Central strength member		FRP+PE sheath when needed
Outer sheath material		LSZH
Tensile strength (N)	Short term	1500(fiber core ≤ 72C),3000(fiber core > 72C)
	Long term	600(fiber core ≤ 72C),1000(fiber core > 72C)
Crush (N/100mm)	Short term	1000
	Long term	300
Min. bending radius (mm)	Static	10D
	Dynamic	20D

Attenuation (dB/km)	At 1310nm (SM)	≤0.35
	At 1550nm (SM)	≤0.21
	At 850nm (MM)	≤3.0
	At 1300nm (MM)	≤1.0

Fiber performance

Single Mode fiber type according to IEC 60793-2-50					
No.	Item	Unit	G652D	G657A1/A2	G657B2/B3
1	Mode-field diameter @1310nm	μm	9.2±0.4	(8.6-9.5)±0.4	(6.3-9.5)±0.4
	Mode-field diameter @1550nm		10.4±0.5	9.8±0.5	9.8±0.5
2	Cladding diameter	μm	125±0.7	125±0.7	125±0.7
3	Core-cladding concentricity	μm	≤0.5	≤0.5	≤0.5
4	Cladding non-circularity	%	≤0.7	≤0.7	≤0.7
5	Coating diameter	μm	245±5	245±5	245±5
6	Cladding-coating concentricity	μm	<12.0	<12.0	<12.0
7	Numerical aperture		0.14	/	/
8	Fiber cutoff wavelength	nm	λ _{cc} ≤1260	λ _{cc} ≤1260	λ _{cc} ≤1260
9	PMD link value	ps/ √ km	≤0.06	≤0.06	≤0.06
9	PMD maximum individual fiber	ps/ √ km	≤0.1	≤0.2	≤0.2
10	Proof test (entire fiber length)	kpsi	≥100	≥100	≥100
11	Attenuation @ 1310nm /1383nm	dB/km	≤0.35	≤0.35	≤0.35
	Attenuation @ 1550nm /1625nm	dB/km	≤0.21	≤0.21	≤0.21
12	Operating temperature	°C	-60 ~ + 85	-60 ~ + 85	-60 ~ + 85
13	Fatigue coefficient (typical)		≥20	≥20	≥20

Multi Mode fiber type according to IEC 60793-2-10						
No.	Item	Unit	OM1	OM2	OM3	OM4
1	Core diameter	μm	62.5±2.5	50±2.5	50±2.5	50±2.5
2	Cladding diameter	μm	125±1.0	125±1.0	125±1.0	125±1.0
3	Core-cladding concentricity	μm	≤1.5	≤1.5	≤1.5	≤1.5
4	Cladding non-circularity	%	≤1.0	≤1.0	≤1.0	≤1.0
5	Coating diameter	μm	245±10	245±10	245±10	245±10
6	Cladding-coating concentricity	μm	<12.0	<12.0	<12.0	<12.0
7	Numerical aperture		0.275	0.200	0.200	0.200

8	Proof test (entire fiber length)	kpsi	≥ 100	≥ 100	≥ 100	≥ 100
9	Attenuation @ 850nm	dB/km	≤ 3.0	≤ 3.0	≤ 3.0	≤ 3.0
	Attenuation @ 1300nm	dB/km	≤ 1.0	≤ 1.0	≤ 1.0	≤ 1.0
10	Operating temperature	°C	-60 ~ + 85	-60 ~ + 85	-60 ~ + 85	-60 ~ + 85
11	Fatigue coefficient (typical)		≥ 20	≥ 20	≥ 20	≥ 20

Mechanical & Environment performance

No.	Item	Test Method	Acceptance Condition
1	Tensile strength test	- Load: short term tensile - Length of cable under load: 50 m - load time: ≥ 1min.	- Loss change ≤ 0.1 dB @1550 nm - Fiber strain $\leq 0.6\%$ - No fiber break and no sheath damage.
2	Crush test IEC 60794-1-2-E3	- Load: 1,000N/100 mm - Load time: ≥ 1min.	- Loss change ≤ 0.1 dB @1550 nm - No fiber break and no sheath damage.
3	Impact resistance test IEC 60794-1-2-E4	- Points of impact: 5 - Times of per point: 1 - Impact energy: 4.5N.m - Radius of hammer head: 12.5mm	- Loss change ≤ 0.1 dB @1550 nm - No fiber break and no sheath damage.
4	Repeated bending test IEC 60794-1-2-E6	- Bending radius: 20 x cable diameter - Load: 150N - Flexing rate: 3 sec/cycle - No. of cycle: 30	- Loss change ≤ 0.1 dB @1550 nm - No fiber break and no sheath damage.
5	Torsion test IEC 60794-1-2-E7	- Length: 1m - Load: 150N - Twist rate: 1 min/cycle - Twist angle: $\pm 90^\circ$ - No. of cycle: 10	- Loss change ≤ 0.1 dB @1550 nm - No fiber break and no sheath damage.
6	Water penetration test IEC 60794-1-2-F5B	- Height of water: 1m - Sample length: 3m - Test time: 24 hours	- No water shall have leaked from the opposite end of cable.
7	Temperature cycling test IEC 60794-1-2-F1	- Temperature step: +20°C $\rightarrow$ -40°C $\rightarrow$ +60°C $\rightarrow$ +20°C - Time per each step: 12 hrs - Number of cycle: 2	- Loss change ≤ 0.05 dB/km@1550 nm - No fiber break and no sheath damage.
8	Compound flow test IEC 60794-1-2-E14	- Sample length: 30cm - Temp: 70°C $\pm$ 2°C	- No compound flow

		- Time: 24 hours	
--	--	------------------	--

Color code

The individual fiber and loose tube shall accordance with standard TIA/EIA-598-A and the color code as below						
No.	1	2	3	4	5	6
Color	Blue	Orange	Green	Brown	Gray	White
No.	7	8	9	10	11	12
Color	Red	Black	Yellow	Purple	Pink	Aqua

Environmental data

Operation temperature	-40°C ~ +70°C
Installation temperature	-20°C ~ +60°C
Storage temperature	-40°C ~ +70°C
2011/65/EC (RoHS)	Compliant

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.