


- 19" standard structure
- Front side operation, convenient for maintenances
- Suitable for FC square/ SC/ LC/ ST/ DLC, MPO, MTP adapter
- Proper patching management
- Integrated splice and distribution unit is adopted

Part number

PRODF-XXX-XXXXX-XXXX-X	Optic distribution frame with fiber distribution panel and optical adapters
1 2 3 4 5 6	
*1 indicate the frame type: A=A type; B=B type; C=C type; D=D type; E=E type	
*2 indicate the frame height: 20=2m; 22=2.2m; 26=2.6m	
*3 indicate the connector style: SC=SC/UPC; SCA=SC/APC; DLC=DLC/UPC; DLCA=DLC/APC...	
*4 indicate the fiber type: SM=single mode G652D; MM=multi mode 50/125	
*5 indicate the capacity: 720=720 cores, 960=960 cores, 1440=1440 cores...	
*6 indicate the pigtail: 0=no pigtail; 1=with 0.9mm pigtail	

Product picture

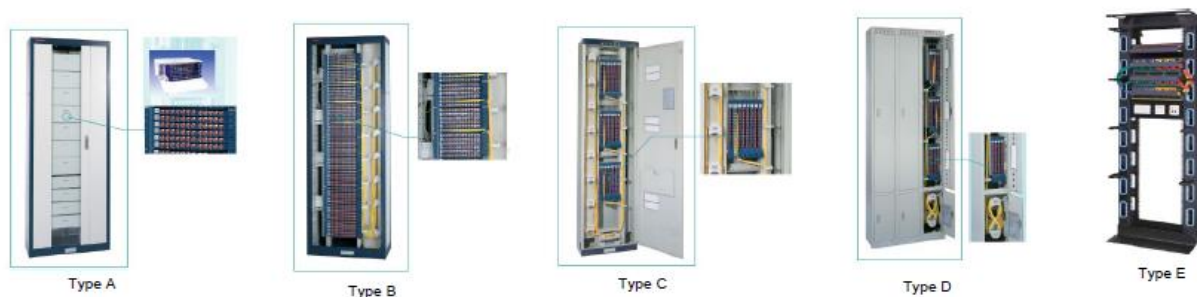

Environmental data

Operation temperature	-25C° ~ +55C°
Storage temperature	-40C° ~ +70C°
2011/65/EC (RoHS)	Compliant

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.