

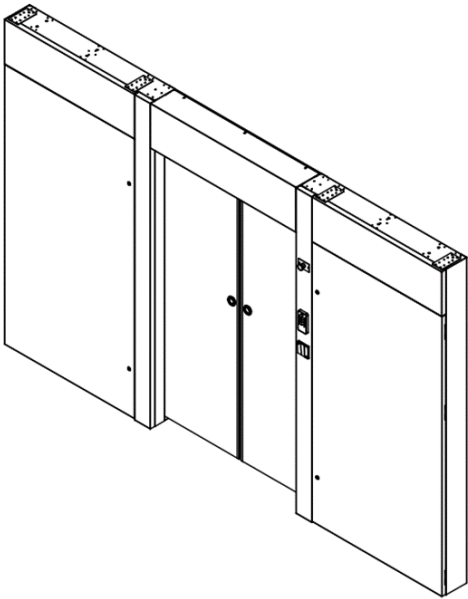
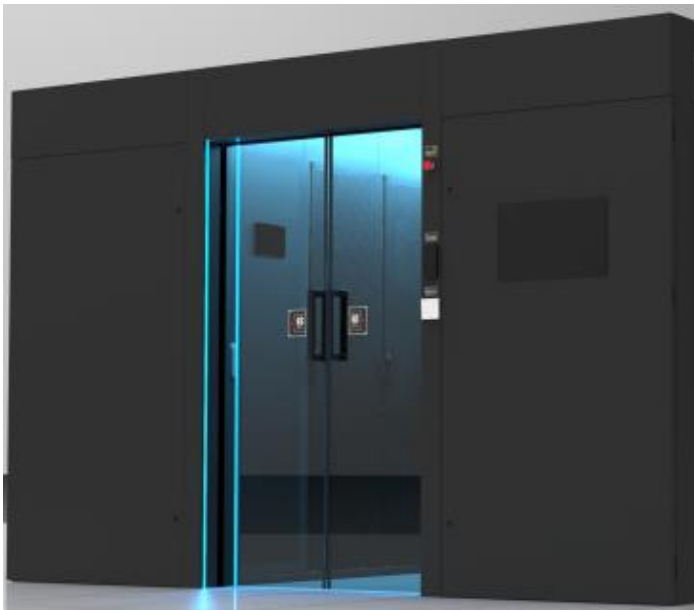


Photo for reference


Part number

KTDDC5DNA	Cold aisle containment door, double door
-----------	--

Specification

Material	SPCC, tempered glass
Surface treatment	Powder coated
Color	Black (RAL9005)
Size	W3600*H2320*D207mm
Tempered glass door	Thickness 10mm
Function	1. Door opens manually by button or remote, with the ability to close automatically. 2. Anti-pinch when opening and closing the door. 3. Backup battery to keep the door open when power shutdown. 4. Ability to keep door open when service is required in cold air enclosure
Accessories to prevent air leakage	The door base contacts the floor, the door edge is fitted with soft cushioning material to prevent air leakage when the door is closed.

Product drawing

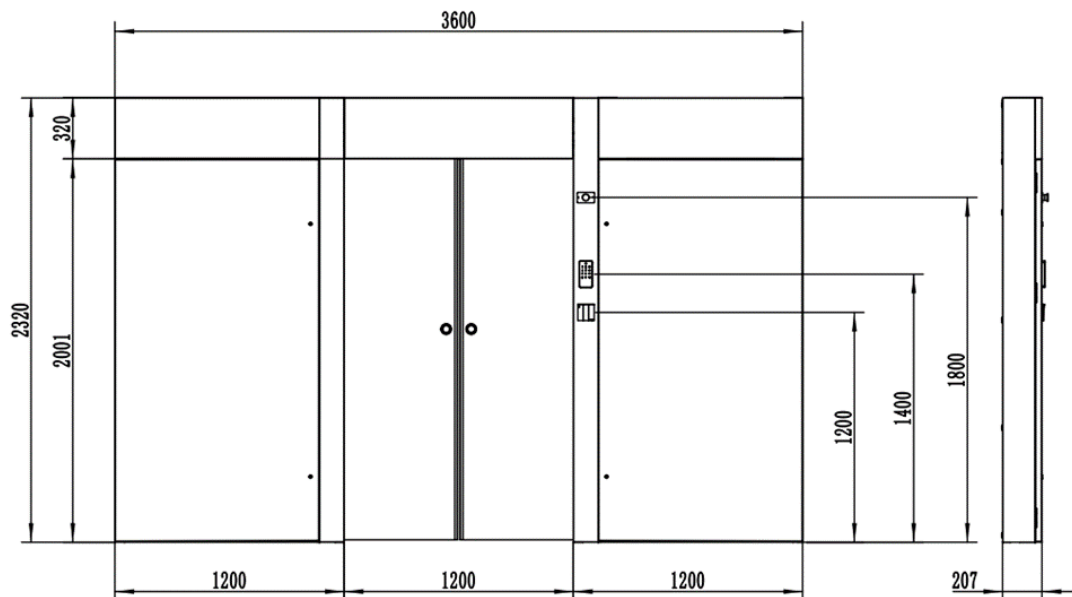

Part list

Item	Part	Description	Material & Finish	QTY	Unit
1	Door cabinet	To hidden the glass doors and installation display and power supply equipment Frame material thickness:2.0mm	SPCC, Powder coated	2	sets
2	Vertical column	For functional switch installation	SPCC, Powder coated	2	pcs
3	Door header		SPCC, Powder coated	1	pcs
4	Tempered glass door		Tempered glass	2	pcs
5	Automatic sliding door unit		Original color	2	sets
6	Power supply equipment	For automatic sliding door and light power supply	SPCC, Powder coated	1	sets
7	Access control	Finger print, password, IC card ZKTECO F7		1	set

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.