

1S32L30D1-20E4G

Power distribution unit

PROSE

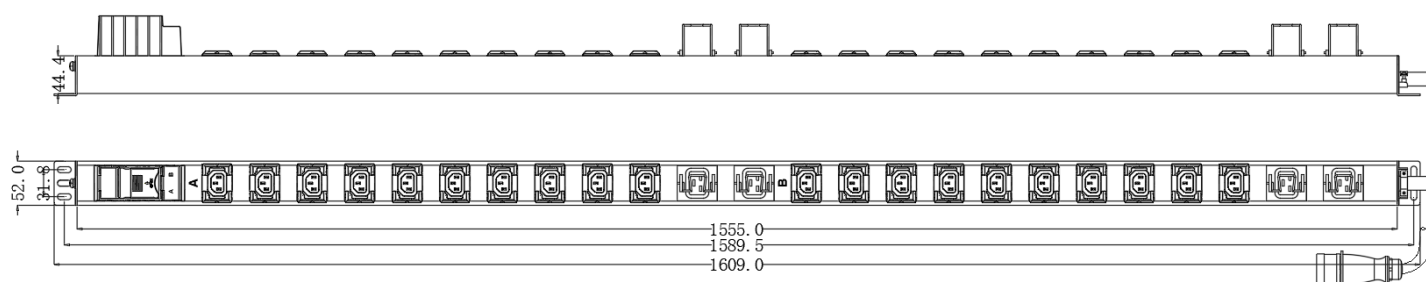


Photo for reference

Part number

1S32L30D1-20E4G

Power distribution unit

Specification

Rated voltage (Input & output)	200~240V AC
Rated frequency	50Hz
Rated current	32A
Socket system and number	IEC320 C19 Anti-detachment x 4 IEC320 C13 Anti-detachment x 20
Internal connecting line	12AWG, 14AWG Electronic wire, red copper bar
Power supply input mode	Cable
Cable plug system	IEC60309 plug 32A 2P+E(N)
Cable specifications	Flexible cable, 3*6mm ² * 3m
Cable installation mode	Bottom input
Cable fixing	Solid wire holder + dustproof rubber ring
Shell color	Black
Size and specification (L*W*H)	1609*52*44.4mm
Fixed hole center distance	1589.5mm
Aluminum alloy shell length	1555mm
Product installation mode	Bracket installation
Installation direction of bracket	Vertical inversion

Control indication function	2*1P/16A CB(CHINT)
Accessories	M6 screws and nuts, 4 set, C19 metal anti-detachment parts 4pcs
Operating temperature	0℃ to 45℃
Operating humidity	5% ~ 95%
Power cord locking mechanism	Has a locking mechanism for the power cord and PDU bar
Type	Installation location: Behind the Rack cabinet and along both sides of the cabinet Use the form of installation, removal and moving up and down
Standards	RoHS

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.