

# PR-CSTX2-40A-XXX-XX

Cold shrink tube  $\phi 40\text{mm}$ , double rubber tube inside

**PROSE**

- Reliable seal against water
- Tough, resilient rubber holds press seal even after exposure
- Eliminates need for heat source or special tools
- Easy installation and save times
- Resistant to fungus, ozone, alkalis and acids



## Part number

|                                                                                            |                                                                 |
|--------------------------------------------------------------------------------------------|-----------------------------------------------------------------|
| PR-CSTX2-40A-XXX-XX                                                                        | Cold shrink tube $\phi 40\text{mm}$ , double rubber tube inside |
| 1 2 3 4                                                                                    |                                                                 |
| *1, CSTX2 indicates the cold shrink tube type                                              |                                                                 |
| *2, 40A indicates the diameter                                                             |                                                                 |
| *3 XXX indicates the rubber length after extracting                                        |                                                                 |
| *4 XX indicates the rubber color, BK-Black, GY-Gray, BU=Blue, YL=Yellow, others as request |                                                                 |

## Material

|              |                 |
|--------------|-----------------|
| Rubber       | Silicone rubber |
| Plastic core | PE/PC           |

## Dimensions

|                                               |                  |
|-----------------------------------------------|------------------|
| Inner diameter (plastic core)                 | 40mm             |
| Inner diameter after extracting (rubber tube) | 10mm             |
| Thickness after extracting (rubber tube)      | 3mm (each layer) |
| Length after extracting (rubber tube)         | As request       |


## Technical data

|                     |        |
|---------------------|--------|
| Hardness, Shore A   | 40     |
| Tensile strength    | 9.0MPa |
| Elongation at break | 820%   |
| Tear strength       | 32kN/m |

## Environment

|                       |                            |
|-----------------------|----------------------------|
| Operating temperature | -40°C to +90°C             |
| Flammability          | UL94-V1                    |
| UV resistance 1000h,  | Pass, black and gray color |
| IP protection         | IP68, IEC 60529            |
| RoHS                  | Compliant                  |

## Drawing

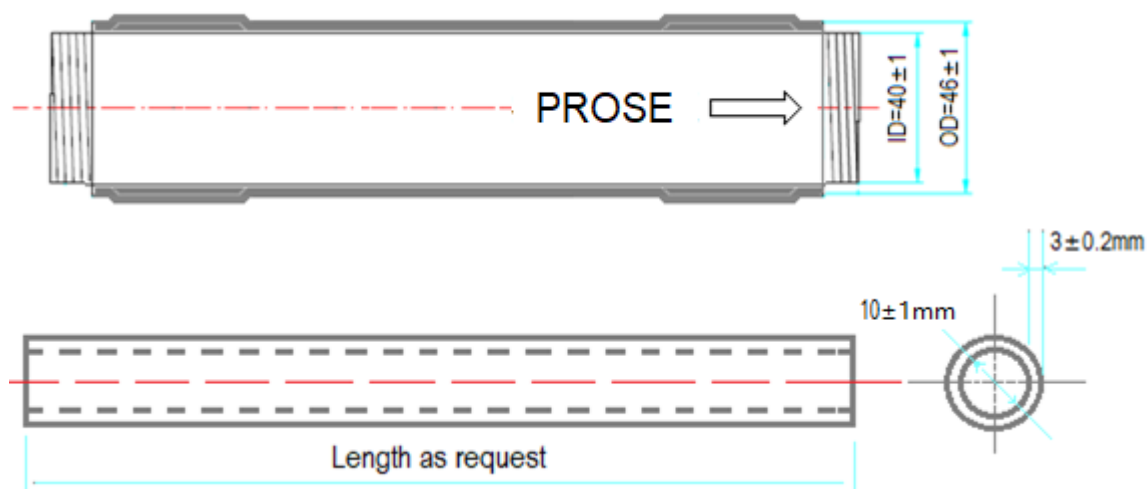

All unit in mm

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.