


# PR-CT-XXxXX-XX

Plastic cable tie, various colors

**PROSE**

- Available in a wide range of material
- Internal serrations allowing for a positive hold onto cable and pipe bundles
- Head guarantees provide high tensile strength while allow a low force
- Flame retardant, heat resistant, UV resistant available
- Various color available

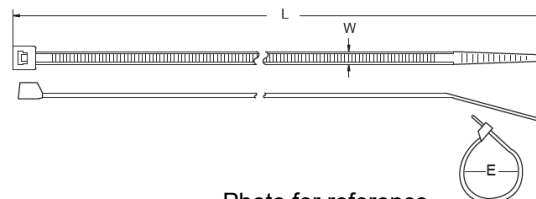

## Part number

|                                                                          |                                               |
|--------------------------------------------------------------------------|-----------------------------------------------|
| PR-CT-XXxXX-XX                                                           | Plastic cable tie, various colors, 100pcs/bag |
| 1 2 3                                                                    |                                               |
| *1 indicate the width(W), unit mm                                        |                                               |
| *2 indicate the length(L), unit mm                                       |                                               |
| *3 indicate the color, BK=Black, WH=White, YL=Yellow, etc                |                                               |
| Eg, PR-CT-2.5x100-BK, means nylon cable tie 2.5x100mm, black, 100pcs/bag |                                               |

## Material

|          |                                     |
|----------|-------------------------------------|
| Material | Nylon, PA66. Black is UV resistance |
|----------|-------------------------------------|

## Environment

|                     |                |
|---------------------|----------------|
| Working temperature | -40°C to +80°C |
| Fire retardant      | UL94-V2        |
| RoHS                | Compliant      |

## Typical dimension

| Width W(mm) | Length L(mm) | Ref. Bundle diameter E(mm) |
|-------------|--------------|----------------------------|
| 2.5         | 100          | 30                         |
| 2.5         | 150          | 35                         |
| 2.5         | 200          | 53                         |
| 3.6         | 120          | 30                         |
| 3.6         | 150          | 35                         |
| 3.6         | 200          | 52                         |
| 3.6         | 250          | 65                         |
| 3.6         | 300          | 76                         |
| 3.6         | 370          | 102                        |
| 4.6         | 120          | 24                         |
| 4.6         | 150          | 35                         |

|      |      |     |
|------|------|-----|
| 4.6  | 200  | 50  |
| 4.6  | 250  | 60  |
| 4.6  | 300  | 76  |
| 4.6  | 370  | 102 |
| 4.6  | 390  | 105 |
| 7.6  | 150  | 33  |
| 7.6  | 200  | 50  |
| 7.6  | 250  | 65  |
| 7.6  | 300  | 76  |
| 7.6  | 370  | 102 |
| 7.6  | 390  | 110 |
| 7.6  | 450  | 132 |
| 7.6  | 500  | 147 |
| 7.6  | 530  | 140 |
| 7.6  | 610  | 180 |
| 8.8  | 380  | 110 |
| 8.8  | 430  | 125 |
| 8.8  | 450  | 132 |
| 8.8  | 500  | 147 |
| 8.8  | 610  | 187 |
| 8.8  | 710  | 190 |
| 12.6 | 380  | 106 |
| 12.6 | 480  | 120 |
| 12.6 | 580  | 152 |
| 12.6 | 730  | 204 |
| 12.6 | 880  | 248 |
| 12.6 | 1030 | 295 |

\*Special dimension is available

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.