

PR-SA01-4FF-Y2

Surge arrester 4.3-10 female to female, gas tube

PROSE

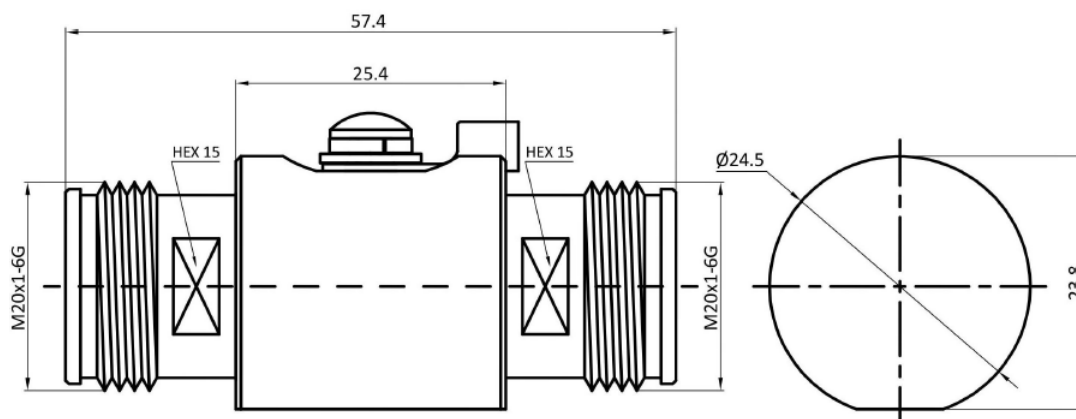


Photo for reference

Part number

PR-SA01-4FF-Y2	Surge arrester 4.3-10 female to female, DC to 3000MHz, gas tube discharge
----------------	---

Performance

Characteristics impedance	50Ω
Frequency	DC-3000MHz
Rating power	400W
Insulation resistance	≥5000MΩ
Withstanding voltage	2500V rms, 50Hz @sea level
Working voltage	1000V rms, 50Hz @sea level
Insertion loss	≤0.25dB
VSWR	≤1.20
Rated DC voltage	230V
Peak discharge current	10kA @8/20u wave
Recommend grounding cable	4mm ²
Interface durability	≥500cycles

Environment

Operating temperature	-40°C to +85°C
RoHS	Compliant

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.