


MW-U06D15

0.6m 15GHz Ultra High Performance Microwave Antenna

PROSE

- Ultra High Performance Antenna
- 14.40-15.35 GHz
- Dual-Polarized



Electrical Data

Operating Frequency		14.40-15.35 GHz
Gain*	Low	36.8 dBi
	Mid	37.1 dBi
	High	37.5 dBi
3dB BW (Azimuth & Elevation)		2.5 deg
Regulatory Compliance		ETSI 302 217 R2 Class4
RPE Number		RPE06-15-U
VSWR (Return Loss)		1.30 (-17.7 dB)
F/B Ratio		68 dB
XPD		30 dB
Polarization		Dual-polarized
Interface Waveguide Type		WR62 (BJ140)

* Tolerance : ± 1.0 dBi.

Environmental Data

Operating Temperature		-55°C to +70°C
Storage Temperature		-55°C to +70°C
Wind resistance	Operational	180 km/h
	Survival	252 km/h

Mechanical Data


Reflector Construction		One-piece reflector
Adjustment	Azimuth	$\pm 15^\circ$
	Elevation	$\pm 15^\circ$
Packed Dimension	L / W / H	775 mm / 775 mm / 620 mm
Packing		1 set in cardboard box
Net Weight		12.7 kg (28 LB)
Gross Weight		17.7 kg (39 LB)

MW-U06D15

0.6m 15GHz Ultra High Performance Microwave Antenna


PROSE

Antenna Dimension (in mm) and Mounting Kit

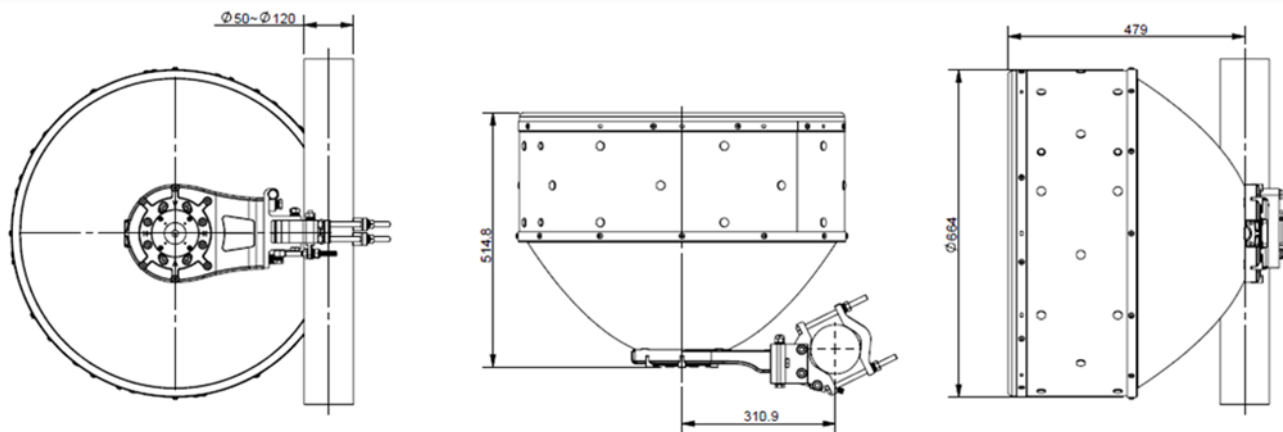

Pole diameter	50-120 mm
Side struts, included	0

Wind Forces at Wind Velocity Survival Rating

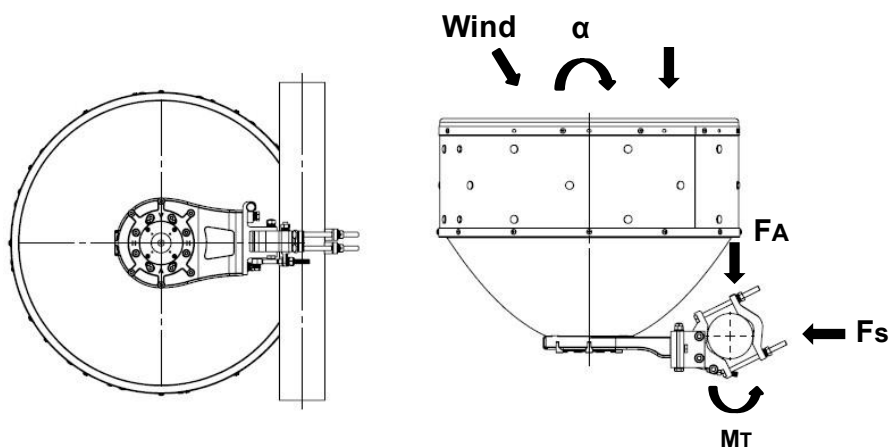

Axial Force (FA)	1313 N
Side Force (FS)	648 N
Twisting Moment (MT)	464 N.M
Angle α for MT Max	0°

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.