


General Instruction

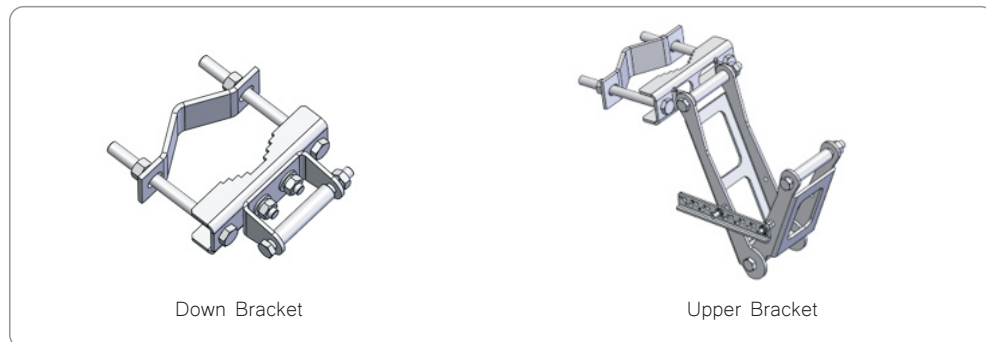

Mount Recommendation

Recommended Mount Torque:

Screw Size	Torque
M5	8N.m
M10	35N.m
M12	50N.m

Recommended Mast Diameter: $\Phi 50 \sim \Phi 114 \text{mm}$

Mount Tool: Adjustable wrench or spanner[7,17,19]

Safety For Mount

1. Do not install near power, telephone lines, and guy wires look the same.
2. Do not install on a wet or windy day or when lightning or thunder is in the area. Do not use metal ladder wear shoes with rubber soles and heels.
3. Wear protective clothing including a long-sleeved shirt and rubber gloves
4. For antenna mount, Maintenance, Removal. Requires qualified, experienced personnel

Mount Steps

1. PRE-ASSEMBLY Mount Down Bracket On Antenna (On Ground Level)

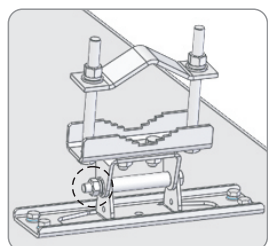


Fig 1. Mounting Down Bracket

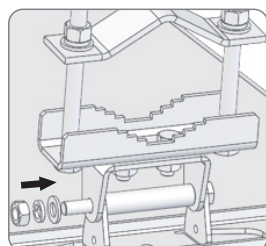


Fig 2. Detail Mounting

2. PRE-ASSEMBLY Mount Upper Bracket On Antenna (On Ground Level)

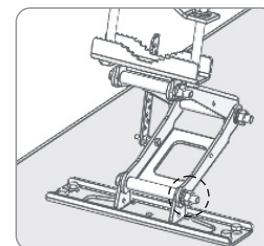


Fig 3. Mounting Upper Bracket


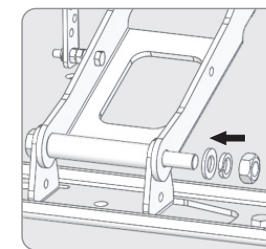


Fig 4. Detail Mounting

▲ All Nuts No Need To Fasten Fully

3. MOUNT ANTENNA ON POLE

Fasten The Clamp Bolt & Nuts. Insure The Bracket Clamp the Pole Firmly And Keep The Antenna Parallel With Mast

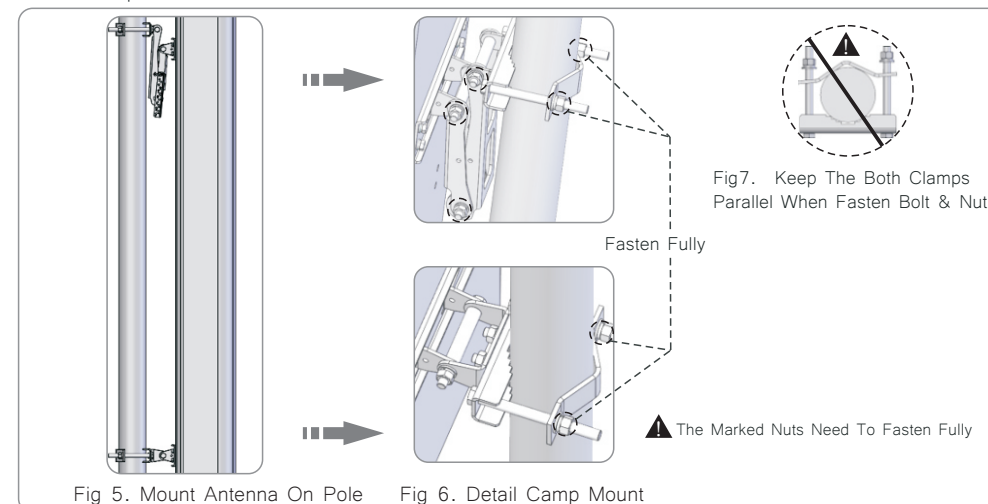

4. SET THE ANTENNA'S MECHANICAL DOWNTILT

Set The Antenna's Downtilt Wanted, Then Fasten The Nuts & Bolts

