



Photo for reference

Part number


KI6242EFA	42U Server rack, 600x1200x42U
-----------	-------------------------------

Specification

Material	SPCC
Surface treatment	Powder coated
Color	Black (RAL9005)
Size	W600*D1200*H1992mm (with wheel)
Standards meet	According to standards specified in EIA310-D/E
Guarantee	3 years
Static load of rack	1500kgs
Number the RMU	1~42 U numbers clearly and cannot be covered by devices
Grounding point	1x Arc front door 2x rear door 1x 19" 18*M6, 2*M8 horizontal grounding bar
Cable holes	6 holes on the top, 4 holes on the bottom, Align with cable management bar mounting location Cable hole cover: Steel, ensures airtightness and ease of handling

Features	
Mobility of the stand	Flexible movement and optional front and rear support bar distance to suit vehicle size device size
Cable hole location	Align with cable management bar mounting location
Rack cabinet link bar	The accessory set connects adjacent rack cabinets to form a row of linked cabinets, the color is consistent with the color of the cabinet.

Product drawing

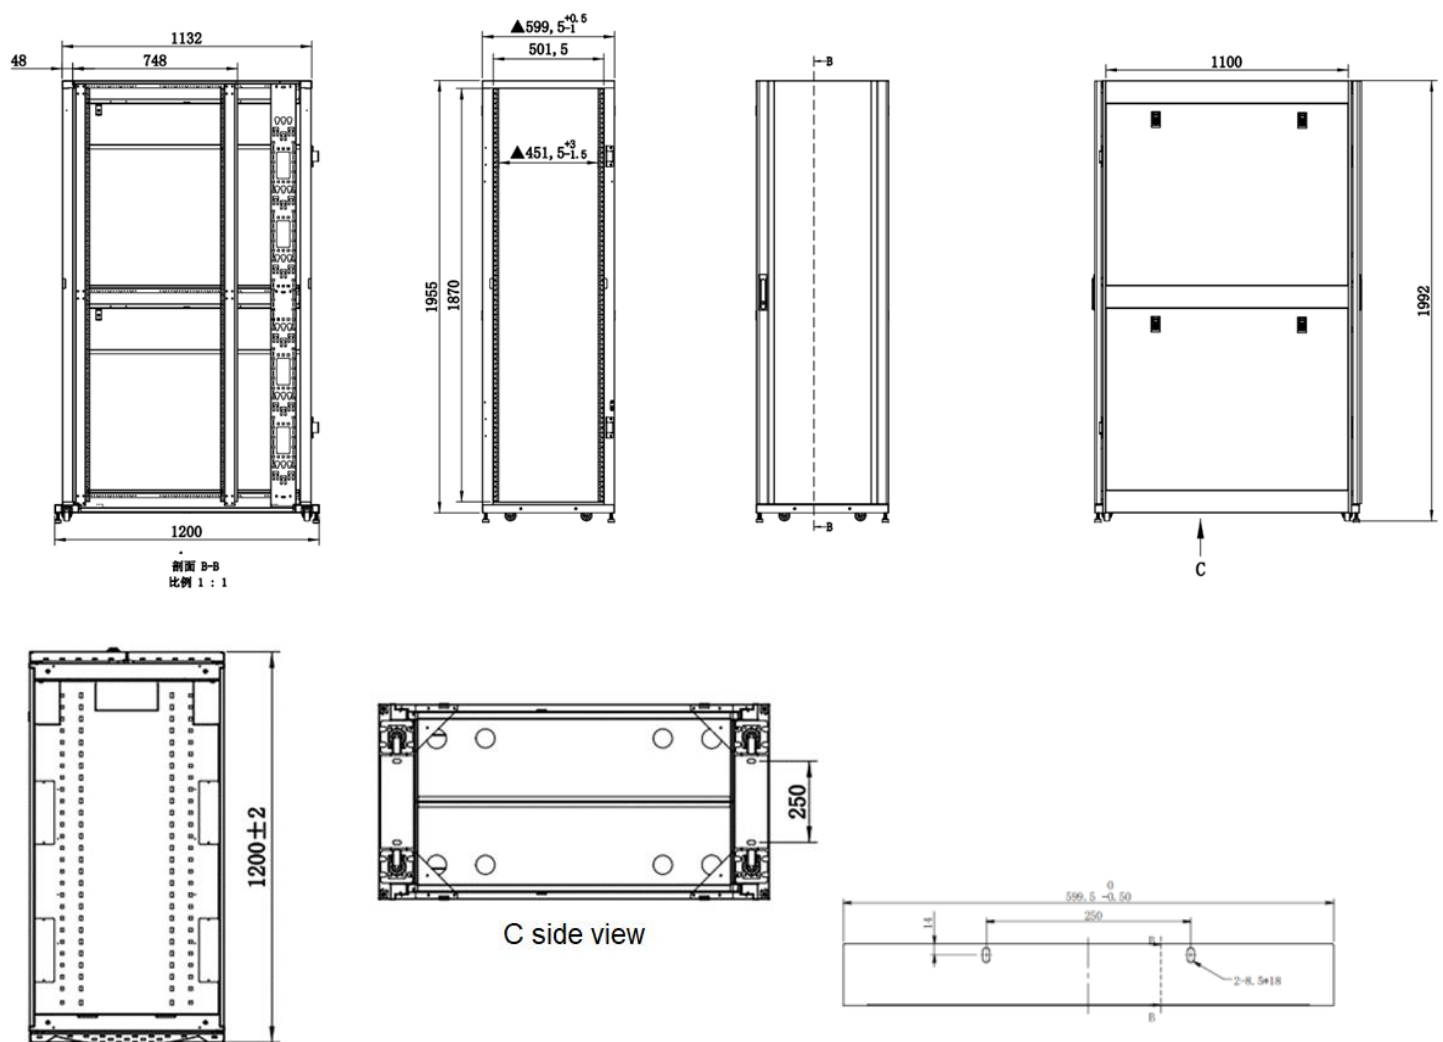

Part list

Item	Part	Description	Material & Finish	QTY	Unit
1	Top panel		SPCC, Powder coated RAL9005	1	pcs
2	Bottom panel		SPCC, Powder coated RAL9005	2	pcs
3	Frame		SPCC, Powder coated RAL9005	2	pcs
4	Side beam		SPCC, Powder coated RAL9005	6	pcs
5	Vertical installation rail		SPCC, Powder coated RAL9005	4	pcs
6	Front door	Mesh arc door, single open, Ventilation 70%, Has lock and lever latch handle, easily removable	SPCC, Powder coated RAL9005	1	pcs
7	Rear door	2-panel mesh type, Ventilation 70%, Has lock and lever latch handle, easily removable	SPCC, Powder coated RAL9005	1	pcs
8	Side panel	Easy to install and remove Structure: Closed plate Door lock: Shares the same lock as the front door and back of rack	SPCC, Powder coated RAL9005	4	pcs
9	Mechanical lock		/	2	pcs
10	wheel		/	4	pcs
11	Adjustable feet		Steel & plastic	4	pcs
12	Screws & nuts	M6 screw, ≥ 15 mm long	Carbon steel, EZ, Anti-rust type and with plastic gasket, Nut easy to install and remove	50	set
13	Buckle tool		Carbon steel, EZ	1	pcs
14	Vertical cable management		SPCC, Powder coated RAL9005	2	pcs
15	Wheel cover	Prevent air go through from the rack wheels space Size:600*76mm	SPCC, Powder coated RAL9005	1	pcs
16	19" grounding kit	19"18*m6, 2*m8 horizontal grounding bar	copper	1	pcs
17	1U blank panel	Plastic	Plastic	24	pcs
18	Anti-static mounting point	Has ESD anti-static catch points	/	1	point
19	Main grounding point	1 main grounding point for the cabinet.	/	1	point
20	Ground wire	Connects between cabinet frame and cabinet door	Cross section 6 mm ²	3	pcs

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.