


Main Features

- Low PIM
- Low weight
- High reliability
- Compact design for easy installation

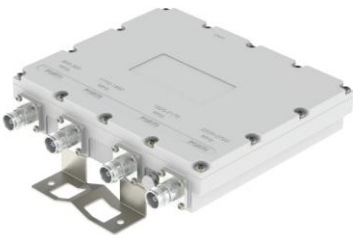

Electrical Specifications

| Items                       | Value                 |
|-----------------------------|-----------------------|
| Frequency                   | CH1: 880-960 MHz      |
|                             | CH2: 1710-1880 MHz    |
|                             | CH3:1920-2170MHz      |
|                             | CH4: 2500-2700MHz     |
| Return loss/ VSWR           | ≤-19dB / 1.25         |
| Insertion loss              | ≤0.3dB                |
| Isolation                   | ≥ 53 dB               |
| Power handling              | 200W average per port |
| Intermodulation (3rd order) | ≤-155dBc@ 2 x 43dBm   |
| DC characteristic           | DC bypass All ports   |
| Impedance                   | 50Ω                   |


Environmental Specifications

| Items                       | Value          |
|-----------------------------|----------------|
| Operating temperature range | -25°C to +65°C |
| Storage temperature range   | -40°C to +85°C |
| Relative humidity           | 5%- 95%        |
| Applications                | IP67           |

Mechanical Specifications

| Items           | Value                                                |
|-----------------|------------------------------------------------------|
| Dimension       | 255x216.5x53 (mm, excluding brackets and connectors) |
| Weight          | ≤ 4.0kg                                              |
| Connectors type | 4.3-10 female                                        |
| Mounting type   | Wall or Pole                                         |
| Packing         | 1Pcs in box                                          |

Outline Drawing

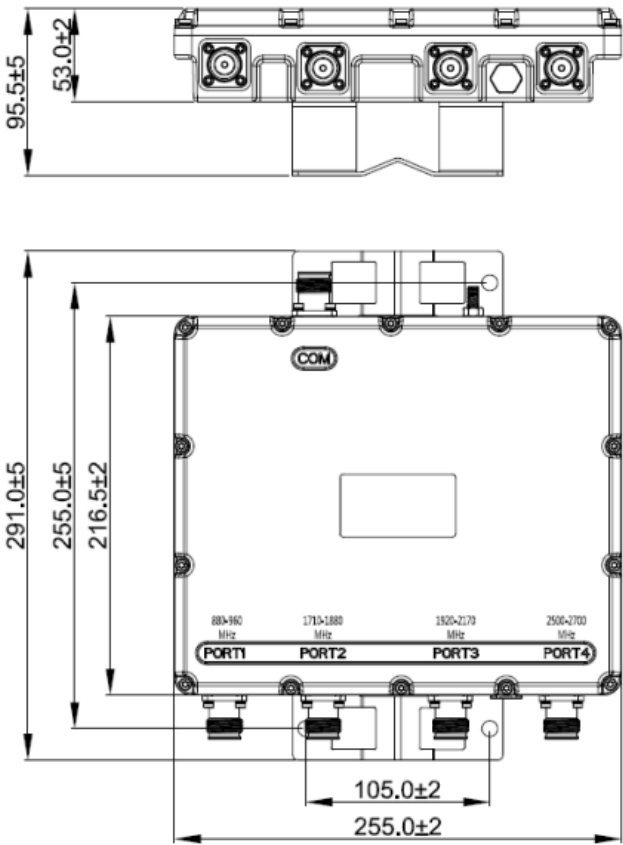

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.